

# The Box for Your Breadbox



## Assembly and User Documentation

applies to bread box rev 3

Document Revision 24 April 2013

## TERMS OF USE

Please read the entire agreement. By using this kit you agree to these terms. If you do not agree, please do not use this kit. If you have any questions or concerns, feel free to contact us.

We are reasonable people, we hope you are too. If you are not, please do not buy or use our products or our web site.

### ***Safety***

Technology and the laws and limitations imposed by manufacturers and content owners are constantly changing. Thus, some of the projects described may not work, may be inconsistent with current laws or user agreements, or may damage or adversely affect some equipment.

Your safety is your own responsibility, including proper use of equipment and safety gear, and determining whether you have adequate skill and experience. Power tools, electricity, and other resources used for these projects are dangerous, unless used properly and with adequate precautions, including safety gear. Some illustrative photos do not depict safety precautions or equipment, in order to show the project steps more clearly.

This project is not intended for use by children.

**Use of these instructions and this kit is at your own risk.** Shrimpware LLC disclaims all responsibility for any resulting damage, injury, or expense. When a kit is connected to or used with another piece of equipment it is your responsibility to make sure that connecting or using this kit will not harm the other equipment.

It is your responsibility to make sure that your activities comply with applicable laws, including copyright. Always check the webpage associated with a project before you get started. There may be important updates or corrections! The United States Fire Administration (USFA) has a guide and many simple steps you can take to prevent the loss of life and property resulting from electrical fires. ([http://www.usfa.dhs.gov/citizens/all\\_citizens/home\\_fire\\_prev/electrical.shtml](http://www.usfa.dhs.gov/citizens/all_citizens/home_fire_prev/electrical.shtml))

If you feel uncomfortable or feel unable to safely assemble any project or kit, simply contact us to return it for a full refund.

### ***Accuracy of Information***

We attempt to ensure that information in this document is complete, accurate and current. However we cannot guarantee that all information is complete or current. You must use your own experience and judgment as a guide when assembling or using this kit

## **LIABILITY DISCLAIMER**

Shrimpware LLC MAKE NO REPRESENTATIONS ABOUT THE SUITABILITY, RELIABILITY, AVAILABILITY, TIMELINESS, AND ACCURACY OF THE INFORMATION, SOFTWARE, PRODUCTS, AND SERVICES PROVIDED BY Shrimpware LLC FOR ANY PURPOSE. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, ALL SUCH INFORMATION, SOFTWARE, PRODUCTS, AND SERVICES ARE PROVIDED "AS IS" WITHOUT WARRANTY OR CONDITION OF ANY KIND. Shrimpware LLC AND/OR ITS SUPPLIERS HEREBY DISCLAIM ALL WARRANTIES AND CONDITIONS WITH REGARD TO THIS INFORMATION, SOFTWARE, PRODUCTS, AND SERVICES, INCLUDING ALL IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL Shrimpware LLC AND/OR ITS SUPPLIERS BE LIABLE FOR ANY DIRECT, INDIRECT, PUNITIVE, INCIDENTAL, SPECIAL, CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF USE, DATA OR PROFITS, ARISING OUT OF OR IN ANY WAY CONNECTED WITH THE USE OR PERFORMANCE OF THE Shrimpware LLC PRODUCTS OR RELATED SERVICES, THE PROVISION OF OR FAILURE TO PROVIDE SERVICES, OR FOR ANY INFORMATION, SOFTWARE, PRODUCTS, AND SERVICES OBTAINED FROM Shrimpware LLC, WHETHER BASED ON CONTRACT, TORT, NEGLIGENCE, STRICT LIABILITY OR OTHERWISE, EVEN IF Shrimpware LLC OR ANY OF ITS SUPPLIERS HAS BEEN ADVISED OF THE POSSIBILITY OF DAMAGES. BECAUSE SOME STATES/JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU. IF YOU ARE DISSATISFIED WITH ANY PORTION OF THE Shrimpware LLC PRODUCTS, SERVICES, OR WEB SITE, OR WITH ANY OF THESE TERMS OF USE, YOUR SOLE AND EXCLUSIVE REMEDY IS TO DISCONTINUE USING THE Shrimpware LLC products.

shrimpware.com

## **Introduction**

You must have a kit that includes a box? Well these are the instructions for assembling it.

My advice is to always double check the fit of the parts **BEFORE** you glue them together. Once you're sure you have the right parts in the right places use just a little dab of glue to hold things together.

Be sure to check our web site for updates and links to information about the Bread Box:

[www.shrimpware.com/breadbox](http://www.shrimpware.com/breadbox)

We hope you enjoy your new toy!  
Jim Schrempp

## Parts List

In your kit you should have:

		Description	Qty
1.		Box Top with Shrimpware logo	1
2.		Box Base, looks like the top piece, but no logo	1
3.		Box Base Sides, these are the thicker	6
4.		Box Top Sides, these are the slimmer ones	6
5.		Hinges	2
6.		Screws	4

## **You Will Need to Supply**

- wood glue and toothpick to spread it
- small screw driver
- some heavy weights (a couple of 2L bottles of soda will do the trick)
- 4 bar clamps, if you have them

## **Tools You Will Need**


- Hopefully none.

## Step 1 Assemble the bottom of the box

First layout the pieces so that you can see how they will fit together. Notice that the bottom piece has a longer notch cut on each side. Look closely and you'll see a small letter etched near each of these bigger notches. Now look at each side piece and you'll see small letters etched on them as well. Lay the



pieces on the table with the etched letters facing up. The letters give you a clue on which pieces go where. When you have it all laid out, put the side pieces in place to make sure you see how they all fit

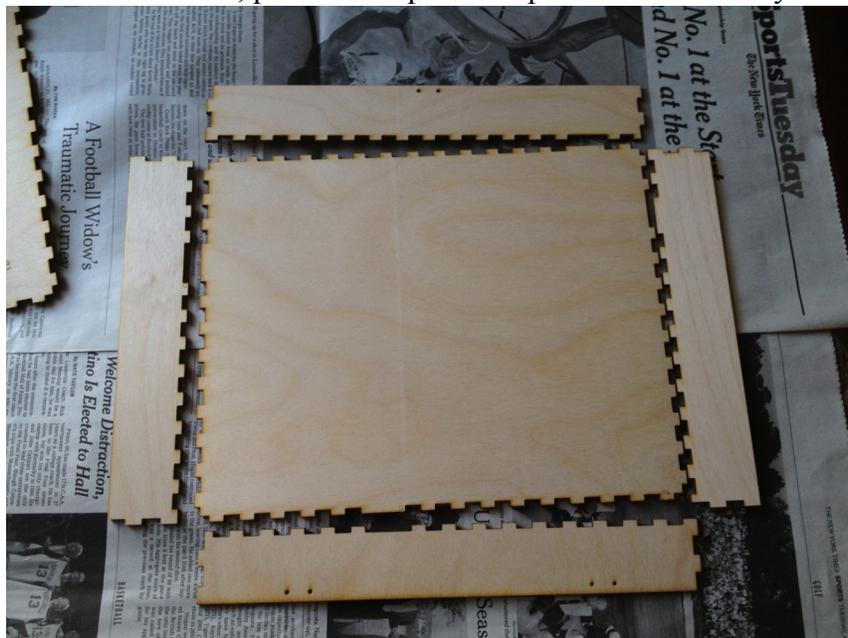

together. Now lay them back on the table again.

Pour out a little wood glue onto a piece of paper. On the bottom piece dab a little bit of glue on each of the fingers. Now put a little glue on the tab ends of each of the side pieces. Assemble the side pieces, using your fingers to push them into place.



Carefully invert the box on a flat surface and place some heavy weights on top. Press the sides in again to make sure they mate closely with the box bottom and with each other. If you happen to have 4 bar clamps you can apply them to hold the sides in tight. Let the assembly dry.



## Step 2 Assemble the top of the box

Layout the pieces of the top with the logo side down. Notice that the ends of each of the sides pieces has a small symbol etched on it – triangle, square, oval, circle. Place the pieces so that like symbols are together. Now rotate the top piece until the longer notches line up with the side pieces.



The assembly of the top is done the same way you did the bottom. Dab a little glue on each tab and put the sides in place.

Invert the top on a flat surface and put heavy weights on it. Press the sides in again to make sure they all fit closely to the top piece. Let it dry.

## Step 3 Add additional interior panels

You have 2 additional pieces for the top and the bottom. These pieces go on the inside of the box to reinforce the sides with the hole for the hinges and the clasp.

Hand fit each piece so you feel how they go together. If you have any stray glue from the last steps you may have to scrape it off to get this new pieces to fit.

One at a time, dab glue on each place and press it into place. Hold it until the glue sets, or use those handy clamps!

## Step 4 Add the hinges

Find the side of the top and bottom with four holes in each. Place these sides together. Use the screws to attach the hinges.

